


Flagpoles & Banner Poles External and Internal (IH) Halyard, Tilting Base



Specifications for Flagpoles T-TB, T-IH-TB, and Banner Poles B-TB					
Model Number	B-20 T-20 T-20-IH	B-25 T-25 T-25-IH	B-30 T-30 T-30-IH	B-35 T-35 T-35-IH	B-40 T-40 T-40-IH
Exposed height	20'	25'	30'	35'	40'
Height below grade	-	-	-	-	-
Total length	20'	25'	30'	35'	40'
Butt diameter	4.06"	4.37"	4.69"	5.06"	5.50"
Top diameter	2.75"	2.75"	2.75"	2.75"	2.75"
Wall thickness	0.13"	0.15"	0.18"	0.21"	0.23"
Pole weight w/ tilting base	43 lbs	50 lbs	58 lbs	73 lbs	103 lbs
Shipping weight	64 lbs	76 lbs	89 lbs	109 lbs	144 lbs
External halyard diameter	1/4"	1/4"	5/16"	5/16"	5/16"
Internal halyard diameter	1/4"	1/4"	1/4"	1/4"	1/4"
Flash collar (square)	10" X 10"	10" X 10"	10" X 10"	10" X 10"	10" X 10"
Finial diameter	4"	4"	5"	5"	6"
Flag clips	Nylon	Nylon	Stainless steel	Stainless steel	Stainless steel
PVC Cleat	5"	5"	7"	7"	7"
Recommended flag size	3' X 5'	4' X 6'	5' X 8'	6' X 10'	6' X 10'
Maximum wind un-flagged	210 mph	190 mph	170 mph	160 mph	140 mph
Maximum wind with flag	170 mph	150 mph <td 130 mph	120 mph	110 mph	
Recommended foundation (diameter X height)	30" X 30"	30" X 36"	30" X 42"	35" X 48"	35" X 54"

Counterweights on internal halyard poles: 2.5 lbs.

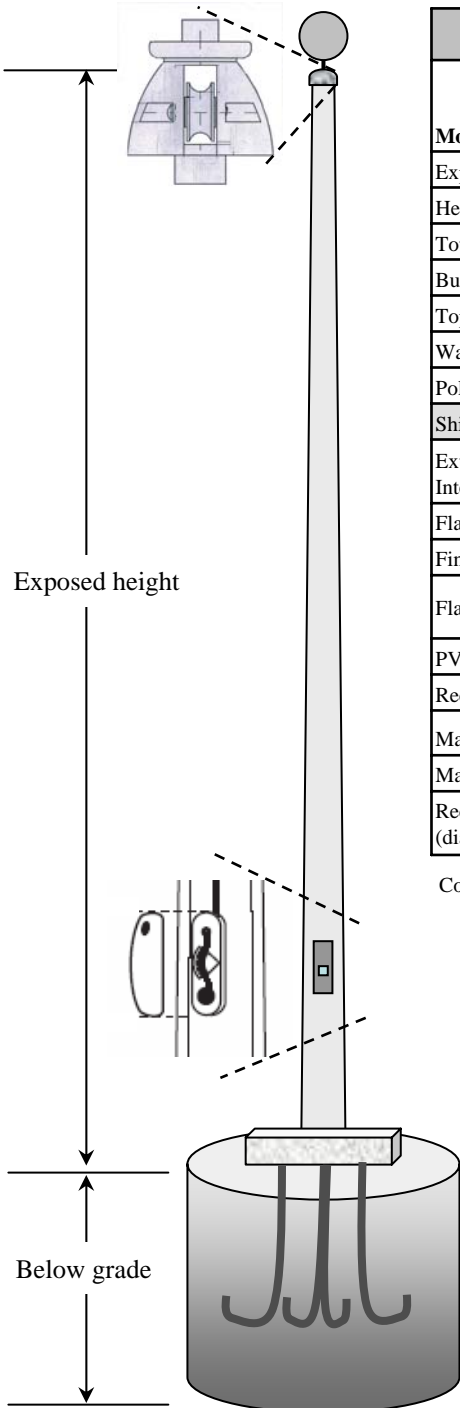